



1 2 3 4 5

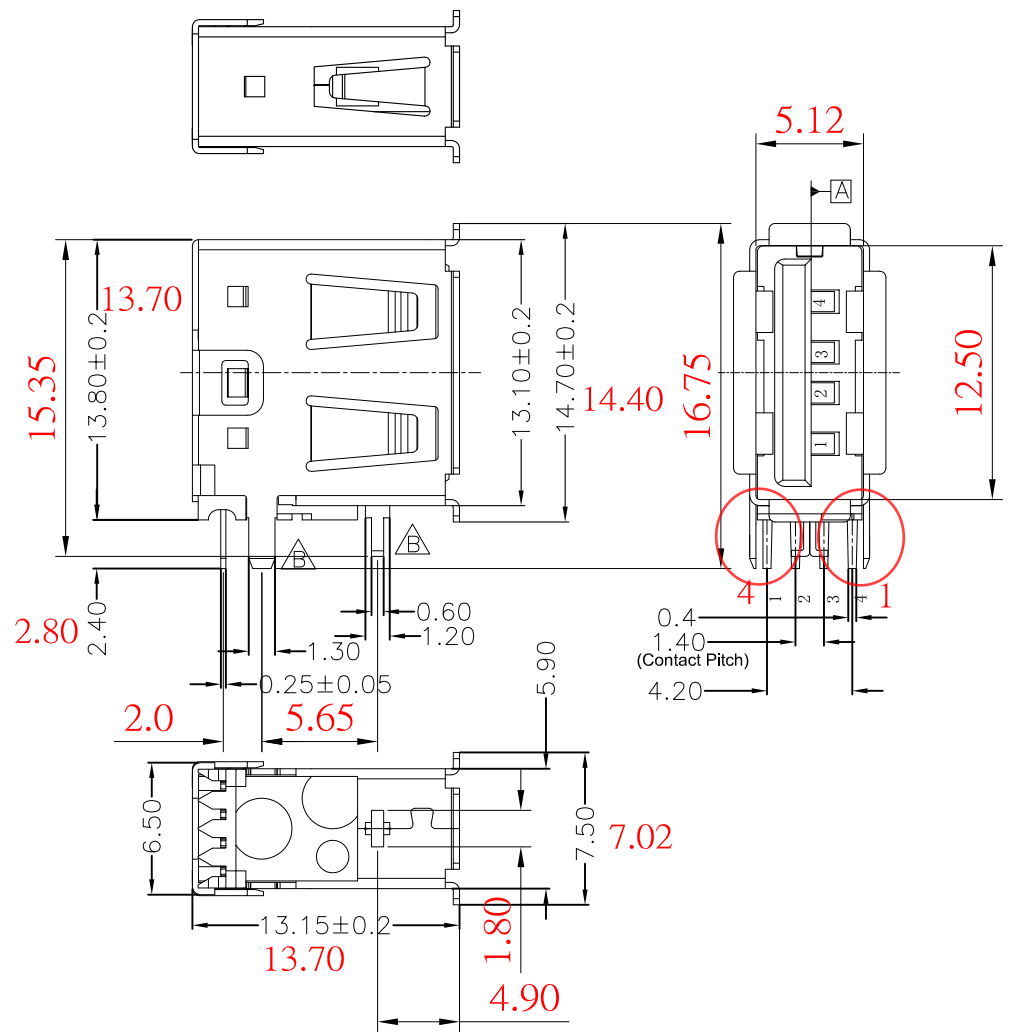

Specifications:
 Current Rating:1.5A(DC) **1.0A**
 Voltage Rating:30V(DC)
 Contact Resistance:30m ohm Max.
 Insulation Resistance:1,000M ohm min.at 500V(DC)
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish
 Insulator:PBT (UL94V-0)
 Insulator:Color: White
 Contact:Brass **Phosphor Bronze**
 Plating:Gold Flash Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:K7, Nickel Plated
Brass

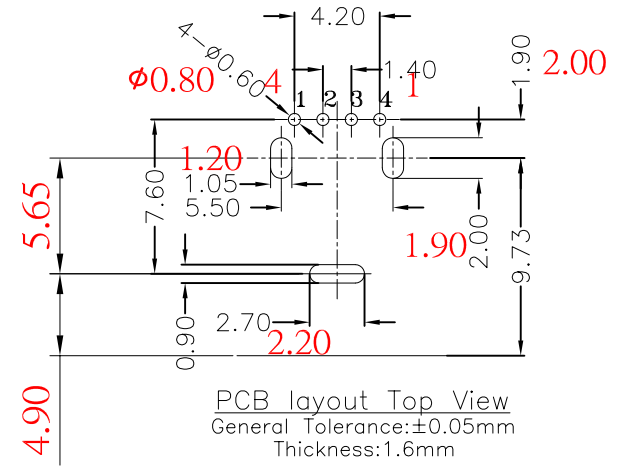

Note: Dimension in red represents old dimension

RoHS Compliant

| | | | | | | | | |
|-----|-------------|------|----|-----------|---|--|--|--------------|
| | | | | DRAWN: | GENERAL TOLERANCE: .X=±0.20 ±0.30 .XX=±0.15 ±0.25 | <h1 style="text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p> | | |
| | | | | CHECKED: | UNIT: MM | | | DESCRIPTION: |
| | | | | | SCALE:1:1 | USB A Female Up-Right Dip, G/F | | A4 |
| | 05-FEB-2020 | | | APPROVAL: | SHEET: 1 / 2 | | | |
| REV | DATE | FILE | BY | | PROJECTION: | 1001-008-01001 | | |

A
B
C
D