



客戶外殼直腳, 繼德青蛙腳

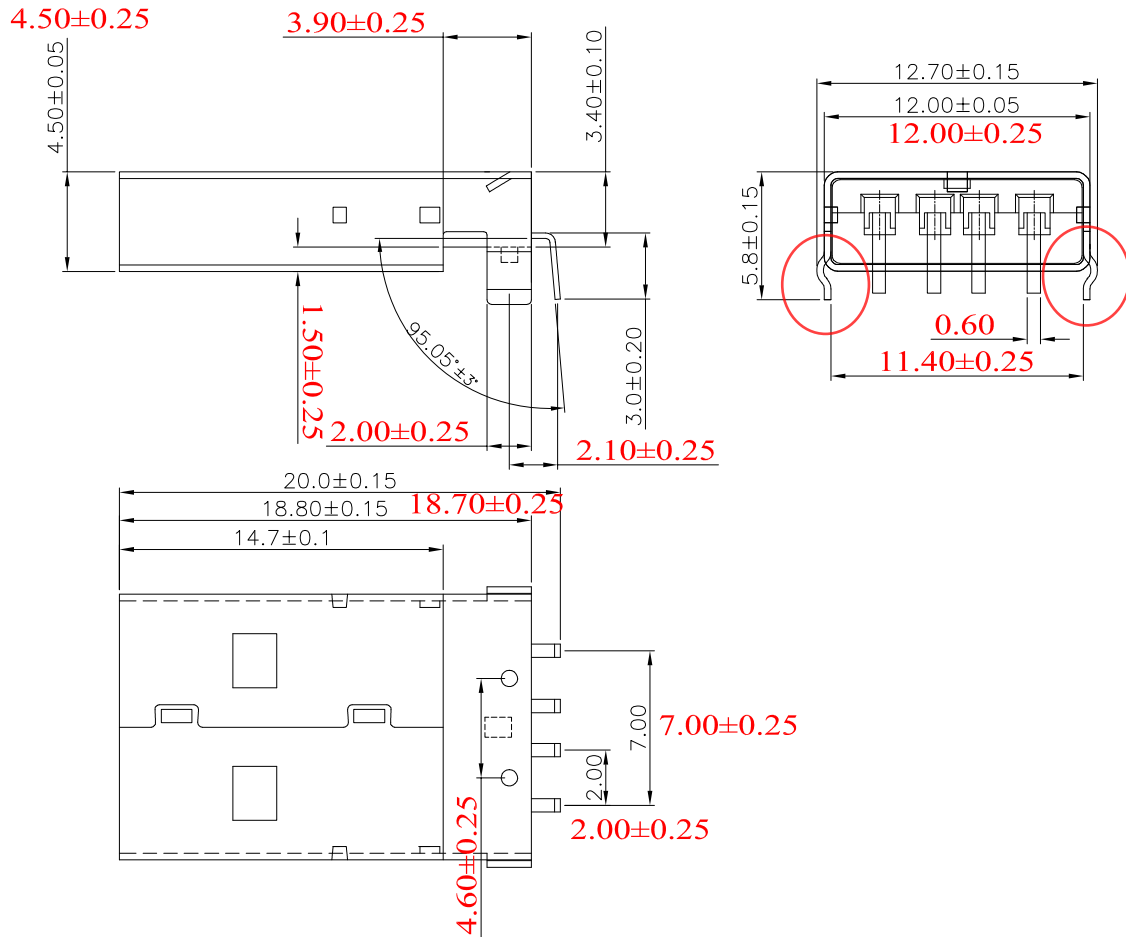

Specifications:  
 Current Rating: 1.5 Amps AC/DC  
 Voltage Rating: 50V AC/DC **30V**  
 Withstanding Voltage: 500V AC  
 Contact Resistance: 30m ohm max  
 Insulation Resistance: 1000M ohm min  
 Temperature Range: -40°C ~ 105°C  
 Material: **-55 ~ 85°C**  
 Insulator: PBT(UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Plating: Gold Flash Plated on Contact Area,  
 Tin Plated on Solder Tail.  
 Shell: Metal Iron, Nickel Plated  
**SPCC**

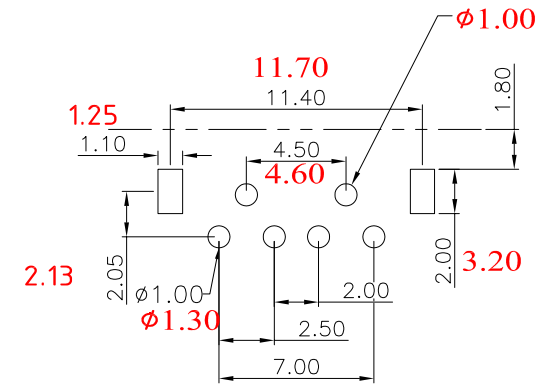

Note: Dimension in red represents old dimension

PCB Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.30 .XX=±0.10 ±0.15	<h1 style="text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM SCALE: 1:1		
				APPROVAL:	SHEET: 1 / 2	PART NO:	1001-010-01001
REV	DATE	FILE	BY		PROJECTION:		