

1




2

3

4

5

Specifications:  
 Current Rating: 1.5A AC,DC  
 Voltage Rating: 30V AC,DC  
 Contact Resistance: 30m ohm.Max  
 Insulation Resistance: 1000M ohm.Min  
 Withstanding Voltage: 500V AC/Minute  
 Operating Temperature Range:-25°C ~ +85°C  
 Mechanical:  
 Mating: 35N Max.  
 Unmating: 10N Min.  
 Durability: 1500 Cycles Min.  
 Material and Finish:  
 Insulator: PBT(UL94V-0)  
 Insulator Color: Black or White  
 Contact: Copper Alloy  
 Plating: Gold Plated on Contact Area,  
 Tin Plated on Solder Tail All over Nickel Plated.

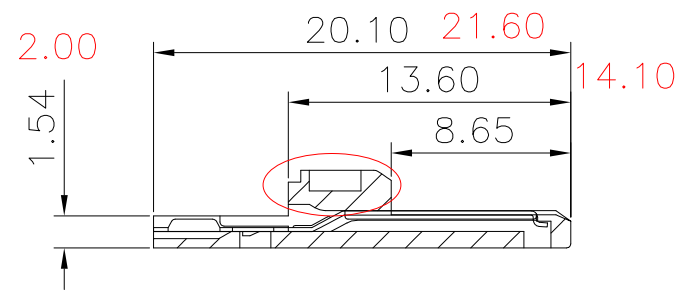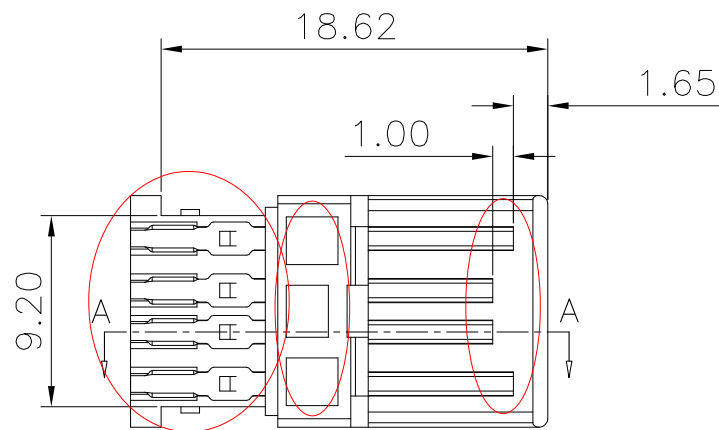

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	.X=±0.35 ±0.30 .XX=±0.25 ±0.20 .XXX=±0.15 ±0.10		
				APPROVAL:	UNIT: MM	DESCRIPTION:	SIZE
					SCALE:1:1	USB A Plug Solder Type, 30u"	A4
	05-FEB-2020				SHEET: 1 / 1	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	1002-024-01300	

A

B

C

D