


UNIT:MM

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	18-10-15	T1015A	NEW DRAWING

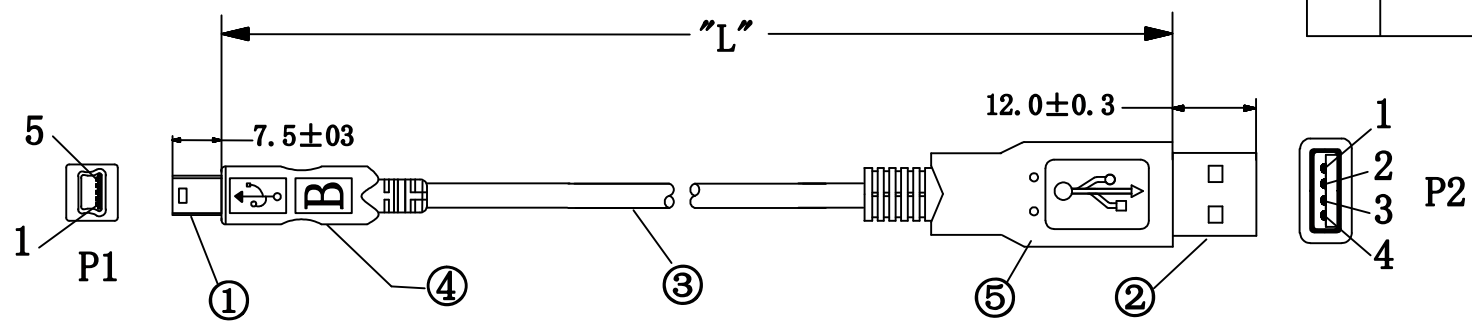


PIN ASSIGNMENT:

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL DRAIN+BRAID SHELL		

CABLE WHITE PRINT
 E166160 AWM 2725 80°C 30V
 28AWGX1P+28AWGX2C

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm (max)
 3. Insulation resistance: 10Mohm (min)
 4. dielectric test: DC 300V

PART NO	WIRE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
101-1031-BL-00200	2000±30		BLACK	2010-2020MM

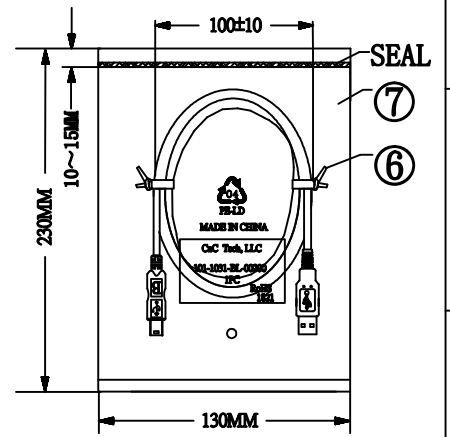

⑧	PE BAG	1/10	CLEAR SIZE:280X330X0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR SIZE:130X230X0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	TIE	2	BLACK L=100mm
⑤	OUT JACKET	6g	BLACK PVC-55P (MOULD NO:2002-527)
④	OUT JACKET	6g	BLACK PVC-55P (MOULD NO:WM-88)
③	CABLE	1	BLACK USB1.1 UL2725 28#/1P+28#/2C+AEB OD:3.8mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 4PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1set	USB MINI 5P MALE SHELL:NICKEL PIN:G/F 3PCS INSULATOR COLOR:BLACK
NO.	NAME	QTY	SPECIFICATION

CnC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2018/10/15	DESCRIPTION: 4C CABLE USB A/M+MINI 5P/M
CHECKED BY:	SHEET 1 of 1	ITEM NO. As above
APPROVED BY:	SCALE 1:1	REV. A/0 UNIT: mm