


UNIT: mm


| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| A/0 | 18-10-11 | T1011A | NEW DRAWING |

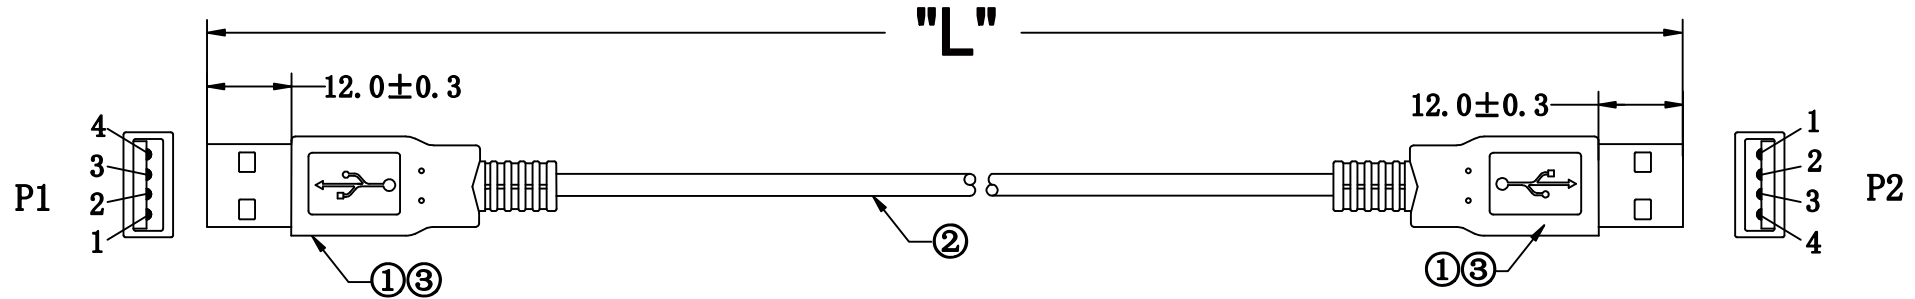

PIN ASSIGNMENT:

| P1 | | P2 |
|-------------------|-------|-------|
| 1 | RED | 1 |
| 2 | WHITE | 2 |
| 3 | GREEN | 3 |
| 4 | BLACK | 4 |
| SHELL DRAIN+BRAID | | SHELL |

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm (max)
 3. Insulation resistance: 5 Mohm (min)
 4. dielectric test: DC 300V

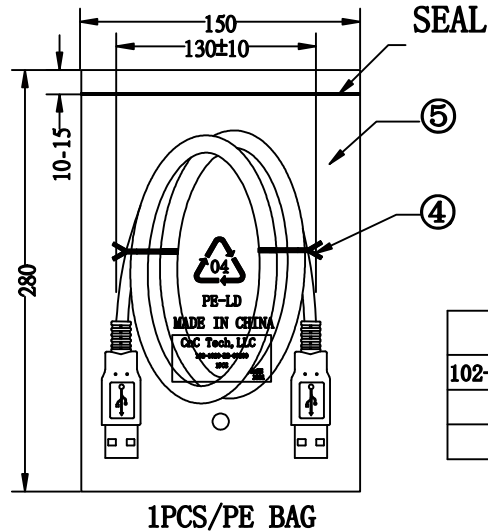

CABLE WHITE PRINT

E166160 AWM 2725 80°C 30V
 28AWGX1P+24AWGX2C USB2.0

| PART NO | WIRE LENGTH "L" | BUYER COLOR | VENDOR COLOR | CUT LENGTH |
|-------------------|-----------------|-------------|--------------|-------------|
| 102-1020-BL-00500 | 5000 ± 50 | | BLACK | 5000-5010MM |
| | | | | |
| | | | | |

1PCS/PE BAG

| NO. | NAME | Q' TY | SPECIFICATION |
|-----|------------|-------|--|
| ⑥ | PE BAG | 1/5 | CLEAR SIZE: 360*380*0.05mm PRINT BLACK "MADE IN CHINA" + "5PCS" |
| ⑤ | PE BAG | 1 | CLEAR SIZE: 150*280*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC" |
| ④ | TIE | 2 | BLACK L=120mm |
| ③ | OUT JACKET | 12g | BLACK PVC-55P (MOULD NO: 2002-527) |
| ② | CABLE | 1 | BLACK USB2.0 UL2725 28#/1P+24#/2C+AEB OD: 4.7mm |
| ① | CONN | 2 | USB A MALE SHELL-NICKEL PIN G/F INSULATION COLOR WHITE 3PCS TYPE |

CnC Tech, LLC
 Industrial Cable and Connector Technology

| | | |
|--------------|---------------------|--------------------------------------|
| DRAWN BY: | DATE: 2018/10/11 | DESCRIPTION: 4C CABLE USB A/M+A/M |
| CHECKED BY: | SHEET 1 of 1 | ITEM NO. As above |
| APPROVED BY: | SCALE 1:1 | REV. A/0 UNIT: mm |