
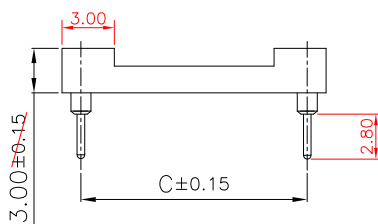



Specifications:  
 Current rating:3.0A AC/DC  
 Voltage rating:60V AC/DC  
 Contact resistance:4m ohm. max.  
 Insulator resistance:1000M ohm. Min.  
 Withstanding voltage:100V AC for one minute  
 Operating temperature range:-40°C to +105°C

Material and Finish:  
 Insulator:PBT (UL94V-0)  
 Contact:Beryllium Copper(Becu) Gold Plated  
 Sleeve Barrel:Brass Tin Plated

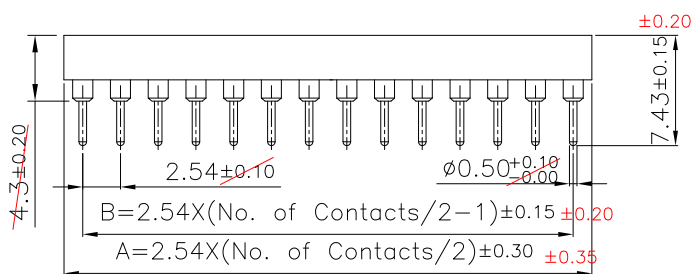

Circuits	Dim							
	A	prior 20/06	B	prior 20/06	C	prior 20/06	D	prior 20/06
6	7.62	7.62	5.08	5.08	7.62	7.62	10.18	10.16
8	10.16	10.16	7.62	7.62	7.62	7.62	10.18	10.16
14	17.78	17.78	15.24	15.24	7.62	7.62	10.18	10.16
16	20.32	20.32	17.78	17.78	7.62	7.62	10.18	10.16
18	22.86	22.86	20.32	20.32	7.62	7.62	10.18	10.16
20	25.40	25.40	22.86	22.86	7.62	7.62	10.18	10.16
24	30.48	30.48	27.94	27.94	15.24	15.24	17.80	17.78
28	35.56	35.56	33.02	33.02	15.24	15.24	17.80	17.78
32	40.64	40.64	38.10	38.10	15.24	15.24	17.80	17.78
40	50.80	50.80	48.26	48.26	15.24	15.24	17.80	17.78
42	53.34	50.80			15.24		17.80	
48	60.96	60.96	58.42	58.42	15.24	15.24	17.80	17.78

Note1: W/O middle bar(6~16P)  
 With middle bar(18~48P)

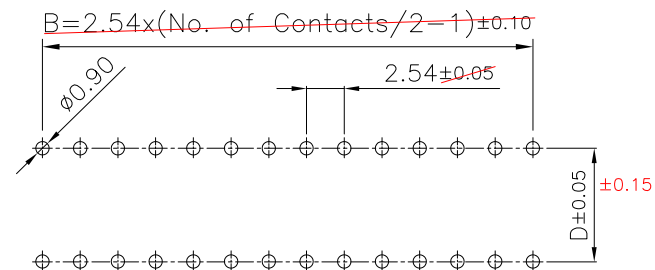

PCB Layout

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.38 ±0.30 .XX=±0.25 ±0.20	<h1 style="color: red;">CnC Tech</h1> Industrial Cable and Connector Technology	
				CHECKED:			
					SCALE: 1:1	2.54mm IC Socket Machine Pin	
	05-FEB-2020			APPROVAL:	SHEET: 1 / 1		
REV	DATE	FILE	BY		PROJECTION:	210-1-XX-00X	

