



Specifications:
 Current rating: 3.0A AC/DC
 Voltage rating: 60V AC/DC
 Contact resistance: 4m ohm. max.
 Insulator resistance: 1000M ohm. Min.
 Withstanding voltage: 100V AC for one minute
 Operating temperature range: -40°C to +105°C
 Gold Plated -55°C~+105°C
 Tom Plated -40°C~+105°C

Material and Finish:
 Insulator: PBT (UL94V-0) PBT/PPS Glass filled thermo
 Contact: Beryllium Copper (Becu) 10u" Gold Plated
 Sleeve Barrel: Brass Tin Plated Tin Plated: 2um/80u"Ni, 5um/200u"Sn
 Gold Plated: 2um/80u"Ni, full gold
 2um/80u", Gold or Tin Plated

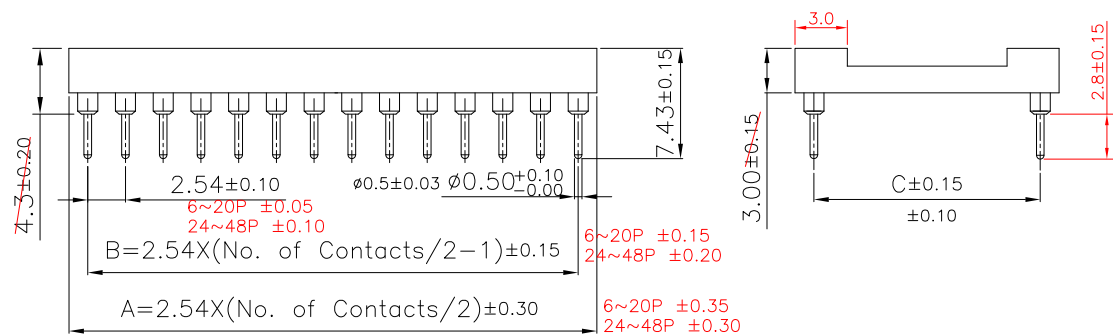

no layout

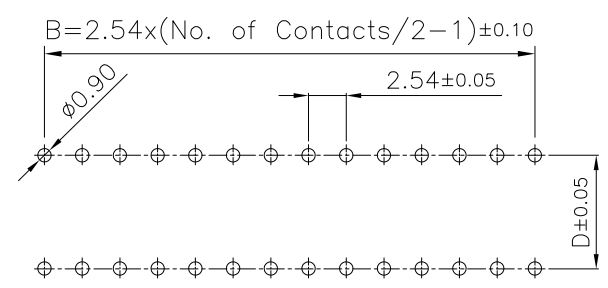

Note1: W/O middle bar (6~16P)
 With middle bar (18~48P)

Circuits	Dim							
	A	prior 20/06	B	prior 20/06	C	prior 20/06	D	prior 20/06
6	7.62	7.62	5.08	5.08	7.62	7.62	10.18	10.16
8	10.16	10.16	7.62	7.62	7.62	7.62	10.18	10.16
14	17.78	17.78	15.24	15.24	7.62	7.62	10.18	10.16
16	20.32	20.32	17.78	17.78	7.62	7.62	10.18	10.16
18	22.86	22.86	20.32	20.32	7.62	7.62	10.18	10.16
20	25.40	25.40	22.86	22.86	7.62	7.62	10.18	10.16
24	30.48	30.48	27.94	27.94	15.24	15.24	17.80	17.78
28	35.56	35.56	33.02	33.02	15.24	15.24	17.80	17.78
32	40.64	40.64	38.10	38.10	15.24	15.24	17.80	17.78
40	50.80	50.80	48.26	48.26	15.24	15.24	17.80	17.78
42	53.34	53.34	50.80	50.80	15.24	15.24	17.80	17.78
48	60.96	60.96	58.42	58.42	15.24	15.24	17.80	17.78

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X = ±0.38 .XX = ±0.25	<h1 style="text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE: 1:1	PART NO:	A4
	05-FEB-2020			APPROVAL:	SHEET: 1 / 1	211-1-XX-00X	
REV	DATE	FILE	BY		PROJECTION:		

