


Specifications:
 Current rating:3.0A AC/DC
 Voltage rating:60V AC/DC
 Contact resistance:20m ohm. max. **4m**
 Insulator resistance:1000M ohm. Min. at 100V min.
 Withstanding voltage:100V AC for one minute
 Operating temperature range:-40°C to +105°C

Material and Finish:
 Insulator:PBT (UL94V-0)
 Standard Color:Black
 Contact:Brass
 Finish:Gold Plated **Tin plated 200u"**
Gold plated

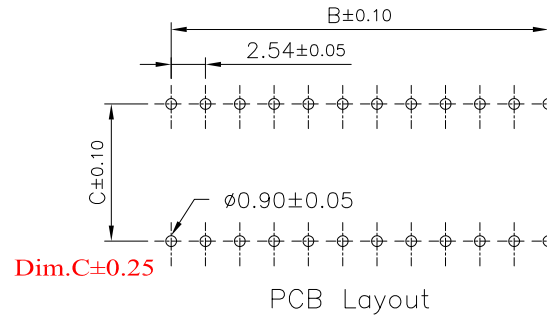

PART NO.	Circuits	Dim							
		A	prior 20/06	B	prior 20/06	C	prior 20/06	D	prior 20/06
220-1-XX-003	6	7.62	7.62	5.08	5.08	7.62	7.62	10.20	10.16
	8	10.16	10.16	7.62	7.62	7.62	7.62	10.20	10.16
	14	17.78	17.78	15.24	15.24	7.62	7.62	10.20	10.16
	16	20.32	20.32	17.78	17.78	7.62	7.62	10.20	10.16
	18	22.86	22.86	20.32	20.32	7.62	7.62	10.20	10.16
	20	25.40	25.40	22.86	22.86	7.62	7.62	10.20	10.16
220-1-XX-006	24	30.48	30.48	27.94	27.94	15.24	15.24	17.80	17.78
	28	35.56	35.56	33.02	33.02	15.24	15.24	17.80	17.78
	32	40.64	40.64	38.10	38.10	15.24	15.24	17.80	17.78
	40	50.80	50.80	48.26	48.26	15.24	15.24	17.80	17.78
	42	53.34	53.34	50.80	50.80	15.24	15.24	17.80	17.78
	48	60.96	60.96	58.42	58.42	15.24	15.24	17.80	17.78

Note1: W/O middle bar(6~16P)
 With middle bar(18~64P)

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.30 .XX=±0.15±0.20	<h1 style="text-align: center; color: red;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM SCALE:1:1		
				APPROVAL:	SHEET: 1 / 1	PART NO: 220-1-XX-00X	
REV	DATE	FILE	BY		PROJECTION:		