


Specifications:
 Current Rating:1.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:15m ohm max
 Insulator Resistance:5000M ohm min
 Dielectric Withstanding voltage:1000V AC/minute
 Operating Temperature:-40°C to +105°C
 Material:
 Insulator:High Temp. Plastic (PBT UL 94V-0)
 Standard Color:Black
 Contacts:Phosphor Bronze
 Finish:Tin Plated

20m
1000M

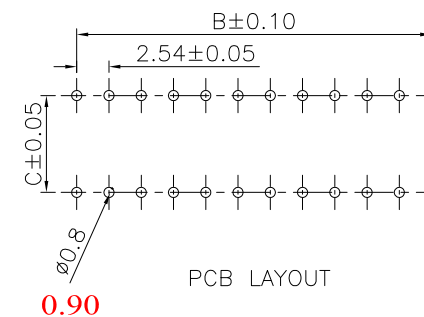

Note1: W/O middle bar(6~20P)
 With middle bar(22~40P)

PART NO.	Circuits	Dim							
		A	prior 20/06	B	prior 20/06	C	prior 20/06	D	prior 20/06
243-XX-1-03	6	7.62	7.62	5.08	5.08	7.62	7.62	10.16	10.16
	8	10.16	10.16	7.62	7.62	7.62	7.62	10.16	10.16
	14	17.78	17.78	15.24	15.24	7.62	7.62	10.16	10.16
	16	20.32	20.32	17.78	17.78	7.62	7.62	10.16	10.16
	18	22.86	22.86	20.32	20.32	7.62	7.62	10.16	10.16
	20	25.40	25.40	22.86	22.86	7.62	7.62	10.16	10.16
243-XX-1-06	24	30.48	30.48	27.94	27.94	15.24	15.24	17.78	17.78
	28	35.56	35.56	33.02	33.02	15.24	15.24	17.78	17.78
	32	40.64	40.64	38.10	38.10	15.24	15.24	17.78	17.78
	40	50.80	50.80	48.26	48.26	15.24	15.24	17.78	17.78

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.30 .XX=±0.15 ±0.20	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE:1:1	2.54mm IC Socket Stamp Pin	
				APPROVAL:	SHEET: 1 / 1		
REV	DATE	FILE	BY		PROJECTION:	243-XX-1-XX	