

1



2

3

4

5

RoHS Compliant

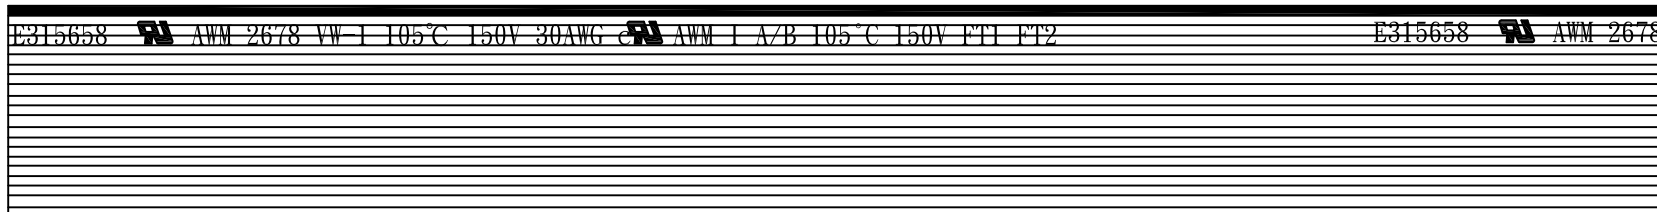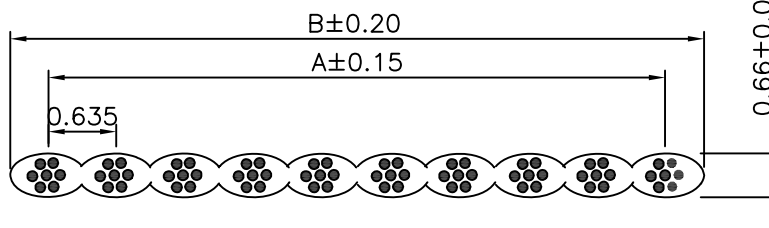



MARKING: E315658 AWM 2678 VW-1 105°C 150V 30AWG AWM I A/B 105°C 150V FT1 FT2

Conductor	Size	UL2678 30AWG			
	Construction	7/0.102±0.005			
	Material	Tinned Copper Conductor			
Insulation	Minimum Thickness	6 mil.			
	Average Thickness	7 mil.			
	Color	Deep Gray			
	Marking	Yes			
Jacket	Diameter	0.66±0.05MM			
	Material	Polyvinyl			
Electric Function	Rate Voltage	150V			
	Rate Temp.	105°C			
	Voltage-Withstand	1500V One Minute			
	Spark Test	1500V/0.15 Sec Min.			
	COND.Resistance	Max:361 ohm/km			
	INSU.Resistance	Min:1G ohm/m			
	Tensile Strength	Degradation before	≥1500PSI	Degradation after	≥70%
	Elongation		≥200%		≥65%

Pin.	A(mm)	B(mm)
10	5.715	6.35
14	8.255	8.89
16	9.525	10.16
20	12.065	12.70
26	15.875	16.51
40	24.765	25.40
50	31.115	31.75

				DRAWN:	GENERAL TOLERANCE:	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	.X=±0.2 .XX=±0.15		
					UNIT: mm	DESCRIPTION: FLAT RIBBON CABLE 30AWG, 0.635MM (0.025") PITCH, GRAY	SIZE A4
					SCALE: 1:1		
A	10-MAY-2017			APPROVAL:	SHEET: 1 / 3	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	300-30-XX-GR-0XXXXF	

Schematic diagram:

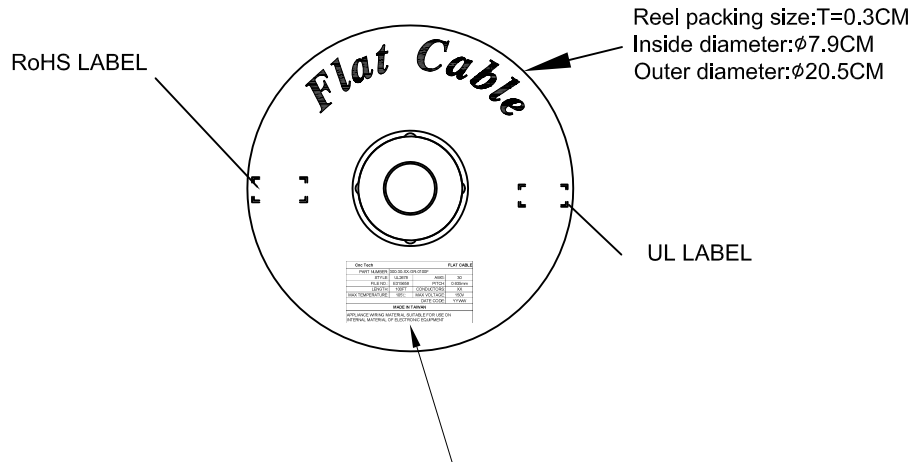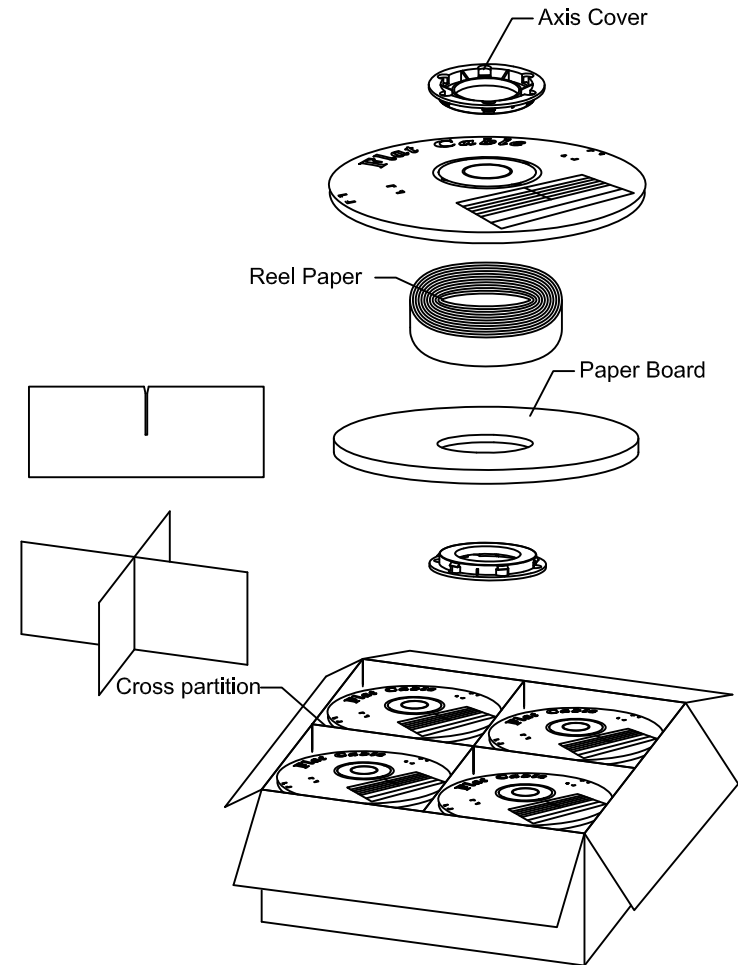

Cnc Tech		FLAT CABLE	
PART NUMBER: 300-30-XX-GR-0100F			
STYLE:	UL2678	AWG:	30
FILE NO.:	E315658	PITCH:	0.635mm
LENGTH:	100FT	CONDUCTORS:	XX
MAX TEMPERATURE:	105°C	MAX VOLTAGE:	150V
		DATE CODE:	YYWW
MADE IN TAIWAN			
APPLIANCE WIRING MATERIAL SUITABLE FOR USE ON INTERNAL MATERIAL OF ELECTRONIC EQUIPMENT			

No. of Contacts	Reel/Carton
10	32
14	32
16	32
20	28
26	24
40	16
50	12

				DRAWN:	GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15	CnC Tech Industrial Cable and Connector Technology	
E				CHECKED:			
D					UNIT: MM	DESCRIPTION: FLAT RIBBON CABLE 30AWG, 0.635MM (0.025") PITCH, GRAY	SIZE A4
C					SCALE:		
B					SHEET: 2 / 3	PART NO: 300-30-XX-GR-0100F	
A	10-MAY-2017			APPROVAL:	PROJECTION:		
REV	DATE	FILE	BY				

1



2

3

4

5

RoHS COMPLIANT

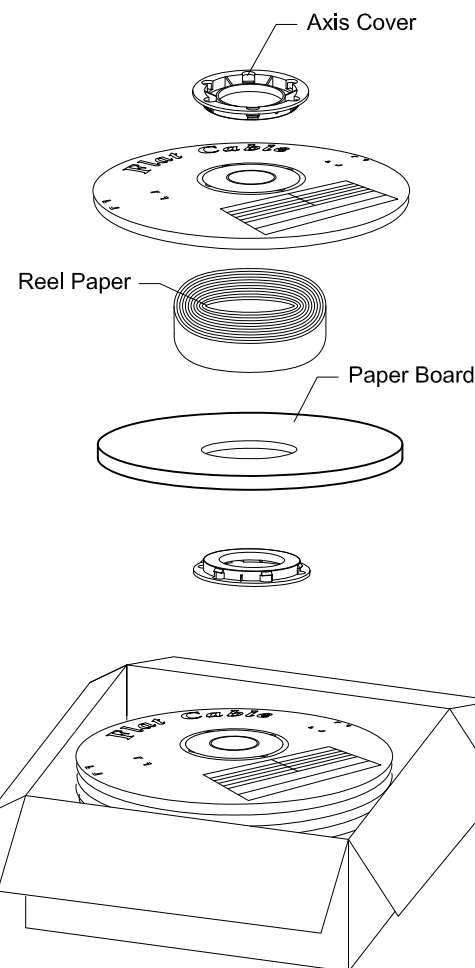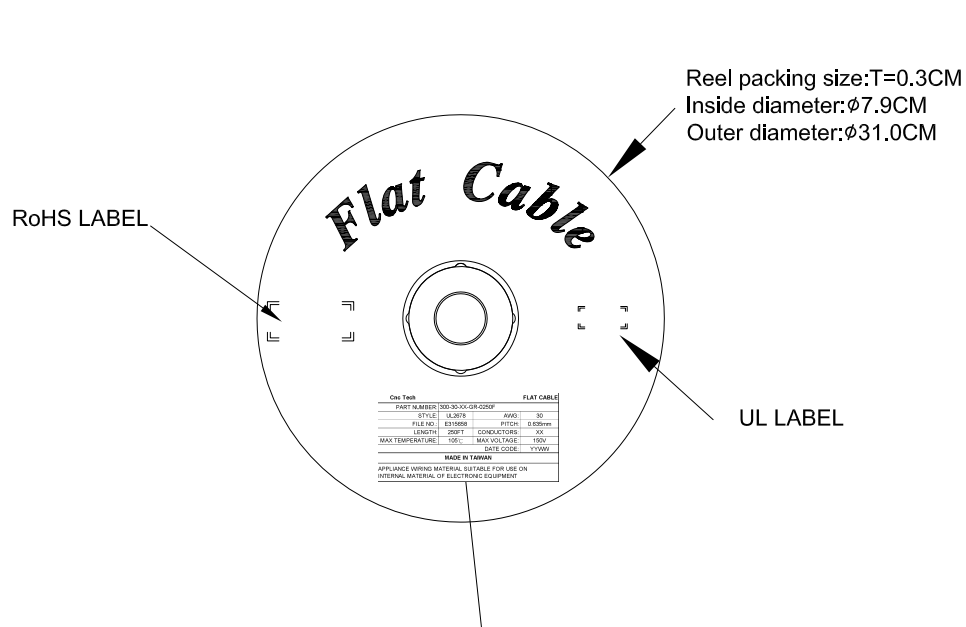Schematic diagram:

No. of Contacts	Reel/Carton
10	13
14	11
16	10
20	9
26	8
40	6
50	5

Cnc Tech		FLAT CABLE	
PART NUMBER: 300-30-XX-GR-0250F			
STYLE:	UL2678	AWG:	30
FILE NO.:	E315658	PITCH:	0.635mm
LENGTH:	250FT	CONDUCTORS:	XX
MAX TEMPERATURE:	105°C	MAX VOLTAGE:	150V
		DATE CODE:	YYWW
MADE IN TAIWAN			
APPLIANCE WIRING MATERIAL SUITABLE FOR USE ON INTERNAL MATERIAL OF ELECTRONIC EQUIPMENT			

E				DRAWN:	GENERAL TOLERANCE: .X = \pm 0.2 .XX = \pm 0.15	CnC Tech Industrial Cable and Connector Technology	DESCRIPTION: FLAT RIBBON CABLE 30AWG, 0.635MM (0.025") PITCH, GRAY	SIZE A4
D								
C				APPROVAL:	SCALE:	PART NO: 300-30-XX-GR-0250F		
B					SHEET: 3 / 3			
A	10-MAY-2017			PROJECTION:				
REV	DATE	FILE	BY					