
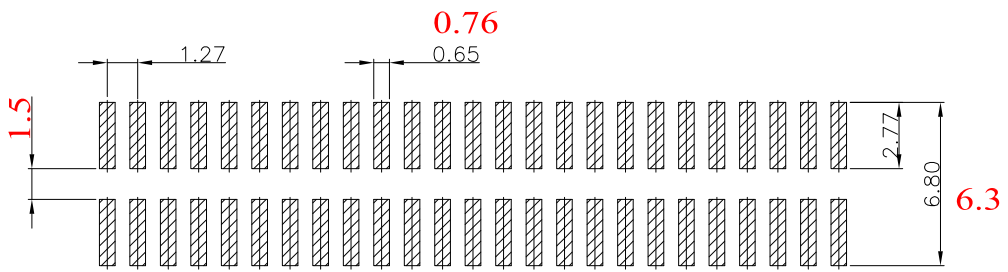


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:50V AC, DC
 Contact tesistance:20m ohm Max **20M**
 Insulation resistance:1,000M ohm Min
 Withstanding voltage:500V AC/minute
 Operating Temperature:-40°C ~ +105°C

Materials:
 Insulator:Nylon 9T(UL94V-0) **6T**
 Standard Color:Black
 Terminal:Brass
 Finish:Gold Plated

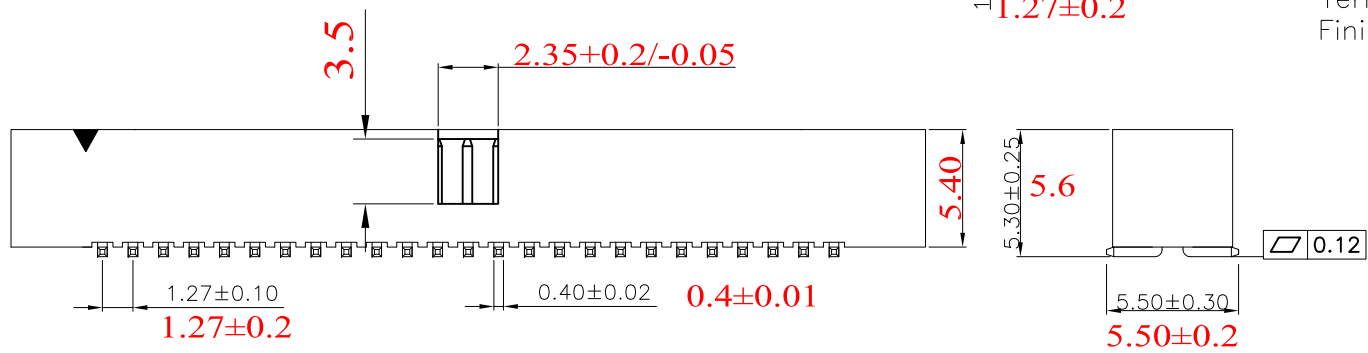

| Circuits | Dim | | | | | |
|----------|-------|-------------|-------|-------------|-------|-------------|
| | A | prior 20/06 | B | prior 20/06 | C | prior 20/06 |
| 8 | 3.81 | | 9.83 | | 11.43 | |
| 10 | 5.08 | 5.08 | 11.10 | 11.25 | 12.70 | 12.65 |
| 14 | 7.62 | 7.62 | 13.64 | 13.79 | 15.24 | 15.19 |
| 16 | 8.89 | 8.89 | 14.91 | 15.06 | 16.51 | 16.46 |
| 20 | 11.43 | 11.43 | 17.45 | 17.60 | 19.05 | 19.00 |
| 26 | 15.24 | 15.24 | 21.26 | 21.41 | 22.86 | 22.81 |
| 30 | 17.78 | 17.78 | 23.80 | 23.95 | 25.40 | 25.35 |
| 34 | 20.32 | 20.32 | 26.34 | 26.49 | 27.94 | 27.89 |
| 40 | 24.13 | 24.13 | 30.15 | 30.30 | 31.75 | 31.70 |
| 50 | 30.48 | 30.48 | 36.50 | 36.65 | 38.10 | 38.05 |
| 60 | 36.83 | 36.83 | 42.85 | 43.00 | 44.45 | 44.40 |

Note: Dimension in red represents old dimension

RoHS Compliant

| | | | | | | | |
|-----|-------------|------|----|-----------|--|--|------|
| | | | | DRAWN: | GENERAL TOLERANCE: .X=±0.20 ±0.25 .XX=±0.15 ±0.2 | <h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p> | |
| | | | | CHECKED: | UNIT: MM | | |
| | | | | | SCALE:1:1 | 1.27mm Box Header SMD Type | SIZE |
| | 05-FEB-2020 | | | APPROVAL: | SHEET: 1 / 1 | PART NO: | A4 |
| REV | DATE | FILE | BY | | PROJECTION: | 3220-XX-0300-00 | |