


1. Wiring Diagram.

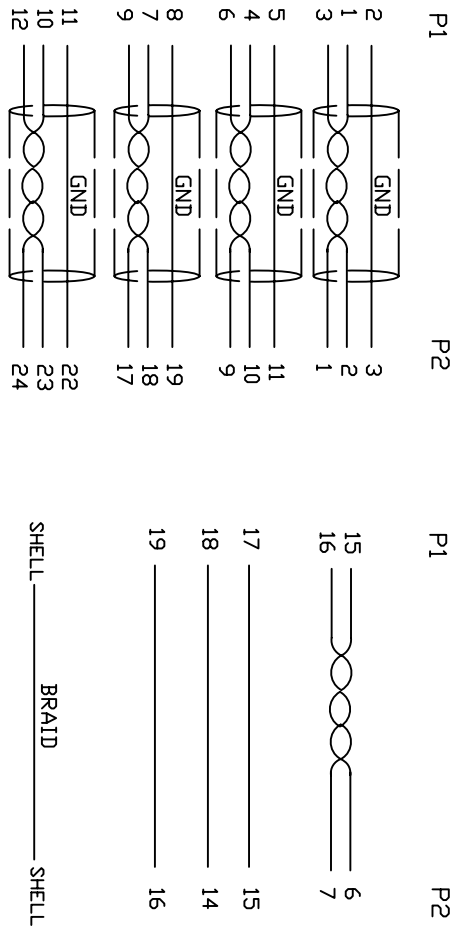

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3. Each pcs with PE polybag.

| | | | | | |
|------------------|----------|--|-----|-----|----------|
| 8 | SCREW | #4-40UNC RE32±0.2mm | BLK | 2 | |
| 7 | COOPER | W30MM*L75MM | | 1 | |
| 6 | COOPER | W13MM*L30MM | | 1 | |
| 5 | PVC | 45P PVC BLACK OVERMOLD | | 80g | |
| 4 | PE | LLDPE 500026 6201 INSIDE MOLDING | | 30g | |
| 3 | CONN | DVI18+1 MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK | | 1 | P2 |
| 2 | CONN | HDMI A TYPE MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK | | 1 | P1 |
| 1 | CABLE | UL20276 (28AWG (1/0.32CUAD) *P+D+EA+AL/MY) *P+28AWG (1/0.32CUAD) *I+P+ 28AWG (1/0.32CU) X3C+AEM(16/8/0.12AM) OD7.3 BLACK | | 1 | 3000mm |
| NO. | PART NO. | DESCRIPTION | | QTY | UNIT/REF |
| BILL OF MATERIAL | | | | | |

| | | |
|---------------------|----------------------------------|------------------------------------|
| A | INITIAL RELEASE | 2017/4/20 |
| REV/ECN# | DESCRIPTION | DATE |
| Cnc Tech,LLC | | |
| DRAWN EDWIN LAI | DATE 2/28/17 | TITLE HDMI M TO DVI18+1 M CABLE |
| CHECKED Win C | CUSTOMER P/N: 741-20010-00300 | DWN NO. 741-20010-00300 |
| APPROVAL | CUSTOMER: | REV |
| | SHEET 1 OF 1 | |