


Note: Dimension in red represents old dimension

PIN OUT:

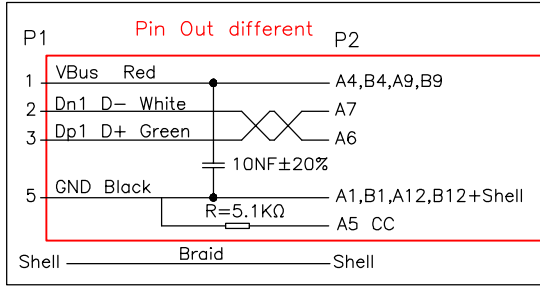

P/N	L
105-1031-BL-00050-1	500±20
105-1031-BL-00100-1	1000±30
105-1031-BL-00200-1	2000±50
105-1031-BL-00300-1	3000±50
105-1031-BL-00500-1	5000±50

ITEM	DESCRIPTION	SPECIFICATION	Q'TY
1	Cable	28AWG(7/0.12TS PVC ID:0.88)*1P+24AWG(7/0.2TS PVC ID:1.35)*2C+AB PVC Jacket OD:4.2 Color:Black	A/R
2	Mini USB B/M	Mini USB 5P B/M Insulator Black,Contact G/F,Shell Nickel Plated	1Set
3	Type C/M	Type C/M Insulator Black,Contact G/F,Shell Nickel Plated 2.0 OTG Rp=5.1KΩ C1=10NF+Shielding	1Set
4	Outer molding	45P PVC Color:Black	A/R

A	04-Jun-2021		
REV	DATE	FILE	BY

DRAWN:	GENERAL TOLERANCE: .X=±0.50 .XX=±0.30
CHECKED:	
APPROVAL:	
	UNIT: MM
	SCALE:1:1
	SHEET: 1 / 1
	PROJECTION:

CnC Tech

Industrial Cable and Connector Technology

DESCRIPTION: MINI USB M TO TYPE C M CABLE	SIZE A4
PART NO: 105-1031-BL-00XXX-1	